

Fuse

RT18 Low Voltage Fuse

A



RT18-32X



RT18-32



RT18L-125




Fuse Link

Fuse Holder


RT18

Type	Assorted Fuse	Rated voltage (V)	Rated Current (A)	Dimension (mm)				
				A	B	C	D	E
RT18-32(32X) 1P	10×38	380	32	82	78	35	63	18
RT18-32(32X) 2P			32	82	78	35	63	36
RT18-32(32X) 3P			32	82	78	35	63	54
RT18-63(63X) 1P	14×51		63	106	103	35	80	26
RT18-63(63X) 2P			63	106	103	35	80	52
RT18-63(63X) 3P			63	106	103	35	80	78

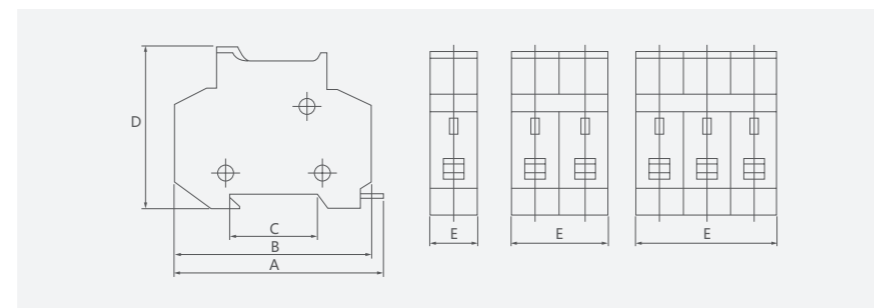

RT18L

Type	Assorted Fuse	Number of Poles	Rated voltage (V)	Conventional heating current (A)	Dimension (mm)				
					A	B	C	D	E
RT18L-63	14×51	1,2,3,4	690	63	108	115	27	78	100
RT18L-125	22×58			125	126	134	36	78	104

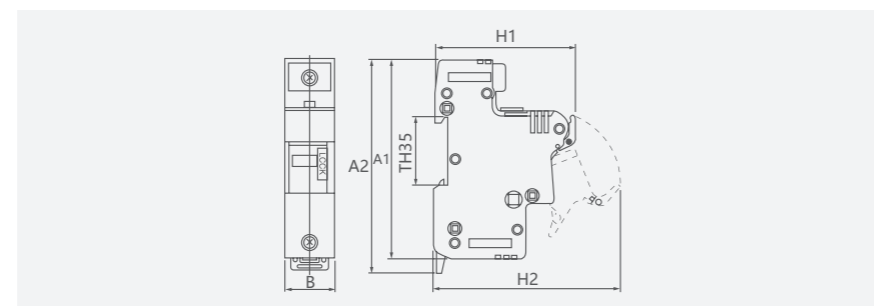

Cylindrical Fuse

Technical Specifications

Dimension (mm)	Rated current (A)	L	Hmax(mm)	ΦC
8.5×31.5	2,4,6,10,16	31.5 ⁰ _{±0.6}	8.2	8.5±0.1
10×38	2,4,6,10,16,20,25,32	31.5±0.6	10.5	10.3±0.1
14×51	2,4,6,10,16,20,25,32,40,50,63	51 ^{0.6} _{±10}	13.8	14.3±0.1
22×58	10,16,20,25,32,40,50,63,80,100,125	58 ¹⁰ _{±20}	16.2	22.2±0.1